




CAPACITY BBL	OUTSIDE DIAMETER (in)[m]		SHELL HEIGHT (in)[m]		OVERALL HEIGHT (in)[m]	
5	34	[0.86]	48	[1.22]	81	[2.06]
10	46	[1.17]	48	[1.22]	86	[2.18]
15	52	[1.32]	60	[1.52]	100	[2.54]
20	58	[1.47]	60	[1.52]	102	[2.59]
25	64	[1.63]	60	[1.52]	104	[2.64]
30	58	[1.47]	96	[2.44]	138	[3.51]
40	64	[1.63]	96	[2.44]	140	[3.56]
50	70	[1.78]	108	[2.74]	154	[3.91]
60	76	[1.93]	108	[2.74]	157	[3.99]
80	88	[2.24]	96	[2.44]	150	[3.81]
90	88	[2.24]	108	[2.74]	161	[4.09]
100	96	[2.44]	108	[2.74]	162	[4.11]
120	100	[2.54]	120	[3.05]	176	[4.47]
150	102	[2.59]	144	[3.66]	200	[5.08]
160	102	[2.59]	156	[3.96]	212	[5.38]
200	108	[2.74]	168	[4.27]	226	[5.74]
240	116	[2.95]	180	[4.57]	244	[6.20]
300	130	[3.30]	168	[4.27]	238	[6.05]
360	138	[3.51]	180	[4.57]	253	[6.43]
400	144	[3.66]	180	[4.57]	255	[6.48]
480	144	[3.66]	228	[5.79]	303	[7.70]

* Custom sizes from 1 BBL to 1000 BBL available upon request.

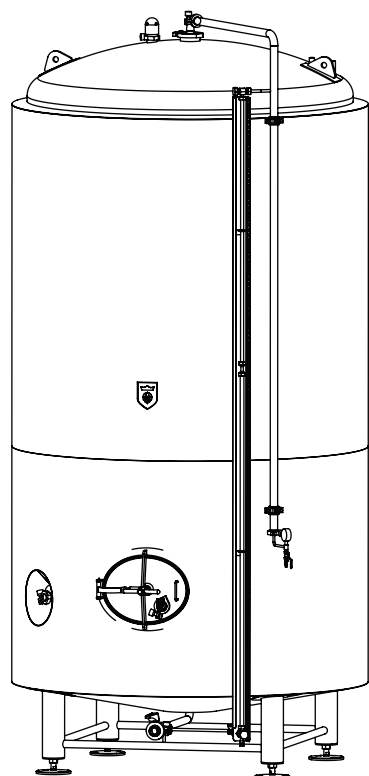

CAPACITY HL	OUTSIDE DIAMETER (in)[m]		SHELL HEIGHT (in)[m]		OVERALL HEIGHT (in)[m]	
5	34	[0.86]	48	[1.22]	81	[2.06]
10	43	[1.09]	48	[1.22]	85	[2.16]
20	55	[1.40]	60	[1.52]	101	[2.57]
25	58	[1.47]	60	[1.52]	102	[2.59]
30	64	[1.63]	60	[1.52]	104	[2.64]
40	61	[1.55]	96	[2.44]	139	[3.53]
50	67	[1.70]	96	[2.44]	141	[3.58]
60	70	[1.78]	108	[2.74]	154	[3.91]
80	82	[2.08]	96	[2.44]	147	[3.73]
90	82	[2.08]	108	[2.74]	160	[4.06]
100	88	[2.24]	108	[2.74]	162	[4.11]
120	96	[2.44]	108	[2.74]	162	[4.11]
160	98	[2.49]	144	[3.66]	199	[5.05]
200	108	[2.74]	144	[3.66]	202	[5.13]
240	108	[2.74]	180	[4.57]	238	[6.05]
300	123	[3.12]	168	[4.27]	234	[5.94]
360	130	[3.30]	180	[4.57]	247	[6.27]
400	134	[3.40]	180	[4.57]	251	[6.38]
480	144	[3.66]	192	[4.88]	257	[6.53]
600	150	[3.81]	228	[5.79]	294	[7.47]

* Custom sizes from 1 HL to 1000 HL available upon request.

KÖNIG Brewing Systems offers world class brewing solutions. From 1BBL Pilot Systems to 150BBL Production Brew Houses, KÖNIG has the experience, skill, and facility to take on an array of project types.

Owned by a Brewer and an Engineer with over 30 years of industry experience and over 500 breweries built, KÖNIG is here to do what we do best, build innovative world-class brewing equipment, and provide exceptional customer service.

STANDARD FEATURES

- All 304SS, #4 finish outside, 2B inside with welds ground and polished
- Vessel design pressure of 15psig
- Flanged and dished dome top and bottom
- Insulated with closed cell PU spray foam
- Side mounted pressure manway
- CIP spray ball for internal tank cleaning
- Removable CIP arm with pressure gauge assembly
- External sight glass with calibration strip
- Side and bottom cooling jackets rated for 35 psig with side glycol ports
- Carbonation port(s)
- Sample tap
- Pressure/vacuum relief valve
- Thermowell for temperature probe (2 for vessels ≥ 100 BBL)
- Combination standpipe/drain assembly
- Seismically rated to withstand S_s values of 0.75 or lower
- Vessel support: Polished stainless steel pipe legs w/ adjustable feet

AVAILABLE OPTIONS


- Custom or horizontal designs to accommodate space considerations
- Copper or copper colored SS cladding/banding
- Pressure differential transmitter for level sensing
- Top glycol ports
- Vessel design pressure above 15psig ASME registered
- Increased jacket design pressures and cooling zones
- Rotating CIP spray ball for internal tank cleaning
- Racking arm
- Dosing port
- Bunging device
- Top manway
- Custom jacket design parameters, heating or cooling
- Design options for seismic ratings of S_s 1.50 or 2.41 are readily available

BENEFITS

- Reduced head space to reduce oxidation
- Continuous jacket coverage from full to empty to avoid stratification



ACCREDITATIONS



sales@konigbrew.com
konigbrew.com